


INSTRUCTIONS

for installing mirror panels

A mirror panel can be mounted as an independent product and integrated with a stretch ceiling.


Mounting options:

Scheme 1: Surface mounted

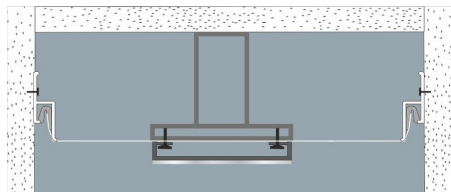


- the mirror panel can be mounted on the surface of the wall or ceiling using the technological holes on the backside of the panel.
- when installing on the surface of the stretch ceiling, one shall first install the mounting panel (not included) at the level of the track of the stretch ceiling. At the points of attachment to the mounting panel, glue the thermal rings of the appropriate diameter to the stretch ceiling. Fixing of self-tapping screws through a stretch ceiling should be carried out only in thermal rings.
- after installing the mirror panel, remove the protective film from the mirror surface. Use gloves!

Scheme 2: Suspended

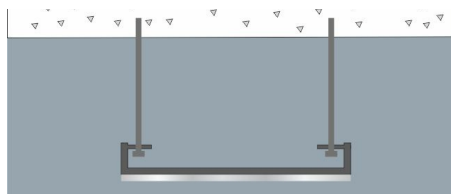


- the mirror panel can be mounted to the ceiling on cable suspensions with a standard length of up to 1.5 meters.
- the mirror panel can be mounted on cable suspensions with a standard length of up to 1.5 meters under the stretch ceiling. In this case, the cable attachment points are located on the base ceiling or mounting plate (not included). The passage of the cables through the stretch ceiling is carried out with the help of thermal rings with a diameter of 10 mm.
- after installing the mirror panel, remove the protective film from the mirror surface. Use gloves!

Scheme 3: Integrated rectangular

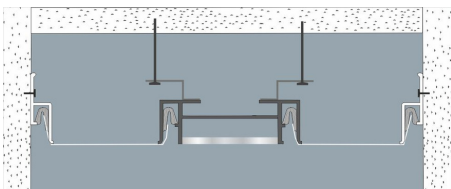

- integrated rectangular mirror panel is integrated into the stretch ceiling. The panel is delivered ready-made with a pre-installed track for the stretch ceiling.
- the panel is mounted to the base ceiling using the mounting angles at the level of the stretch ceiling.
- the stretch ceiling should be ordered with 10% tension, to avoid the olds in the stretch ceiling at the corners of the panel.
- after installing the mirror panel, remove the protective film from the mirror surface. Use gloves!

Scheme 4: Integrated round

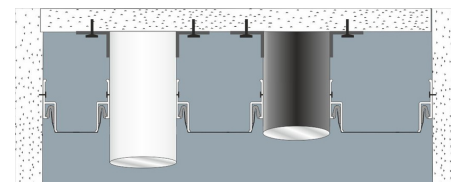

- integrated round mirror panel is integrated into the stretch ceiling. The panel is delivered ready-made with a pre-installed profile for the stretch ceiling.
- the mirror panel can be integrated both at the level of the stretch ceiling, and protrude from it if it is required by design. This option is specified when ordering the design.
- the mirror panel is installed in such a way that the levels of the stretch ceiling and the profile on the panel coincide.
- after installing the mirror panel, remove the protective film from the mirror surface. Use gloves!

Attention! Work with a mirror surface shall be carried out carefully, one shall avoid hitting from both the outer and inner sides of the mirror sheet. This can lead to damage to the surface and distortion of the reflection! If necessary, the mirror surface can be cleaned with window cleaning products without the use of abrasive materials.

info@sarosest.com

+372 3566320

www.sarosest.com

www.saroslight.com

**SAROS
DES)GN**